

tempmate.®-S1 V2

⇒ Single-Use USB Data Logger for Cold Chain Temperature Monitoring



1 Depending on Storage Conditions | 2 Depending on Configuration | 3 Background Logging, even if stopped too early



**PHARMACEUTICAL
PRODUCTS**



FOOD & PRODUCE



**TECHNICAL
PRODUCTS**

Outstanding Single-Use Temperature Logger, for Reliable Cold Chain Monitoring.

The new tempmate.®-S1 V2 loggers have an integrated USB port and PDF & CSV generating software on-board, so no further software or hardware is required to connect the logger and read the recorded temperature data.



tempmate.com



**USB
Connection**



**IP 67
Protected**



**Temperature Range
-30°C to +70°C**



**EN 12830
Compliant**




**Automatic PDF
& CSV Report**



**German
Quality**

tempmate.®-S1 V2


If temperature matters.

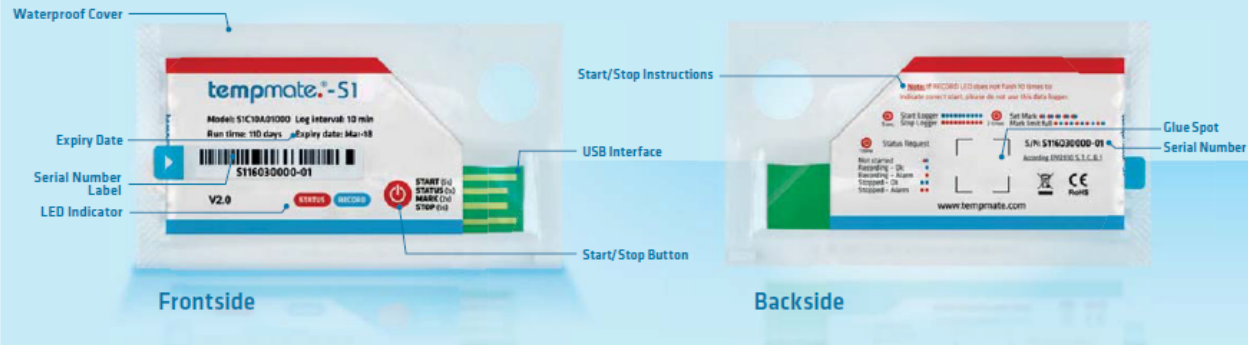

Easy Handling



01 Preconfigured and ready to use



02 Add started tempmate.-S1 to your Shipment



03 Connect stopped Logger directly to USB Port



04 Automated PDF & CSV Report with all Details

Curious about your Cold Chain?

tempmate.®-S1 continuously monitors all relevant data.

tempmate.®-S1 loggers are specially designed for temperature monitoring in any cold chain logistics. As a pre-programmed device tempmate.®-S1 can be instantly used to monitor your temperature sensitive consignment. The automatically created PDF and CSV report, containing detailed information such as data curve, every single measurement as a table and statistical information. The optional tempbase.® software for data management and reprogramming can be downloaded for free.



Your Benefits at a Glance

- ⊕ Cost-Effective and Reliable
- ⊕ Smart Design, Intuitive Operation
- ⊕ Waterproof and Food Grade Packing
- ⊕ No Additional Hardware or Software Required
- ⊕ Detailed PDF and CSV Report Including Graph and Table
- ⊕ Intelligent LEDs for Status Monitoring
- ⊕ Extended Shelf-Life of 2 Years
- ⊕ Reprogrammable

Technical Specifications

Recording Options	Single-Use
Temperature Range	-30 °C to 70 °C
Temperature Accuracy	±0.5 (-20°C/+40°C); ±1.0 (other range)
Temperature Resolution	0.1°C
Data Storage Capacity	16.000 readings
Shelf Life / Battery	2 years ¹ / CR2450 button cell
Recording Interval	10 minutes (standard, others on request)
Recording Duration	up to 110 days ² (standard, others on request)
Startup Mode	Button or software
Stop Mode	Button, software or stop when full
Protection Class	IP67 / NEMA 6
Dimensions	83 mm x 47 mm x 7 mm (L x W x H)

Weight	14.6 g
Certifications	EN 12830, CE, RoHS
Validation Certificate	Hardcopy and PDF file in memory
Software	PDF or CSV Reader / tempbase.® optional
Report Generation	Automatic PDF & CSV report
Password Protection	Optional on request
Connection Interface	USB 2.0, A-Type
Alarm Configuration	Optional, up to 5 points
Reprogrammable	Yes, with free tempbase.® software
Accessories incl.	Shipping Documents, Certificate, Re-program Label and Seal-Bag

1 Depending on optimal storage conditions (+15°C to +23°C / 45% to 75% rH)
2 Depending on application temperature (very low / high temperatures may shorten it)